




NEW PRODUCTS

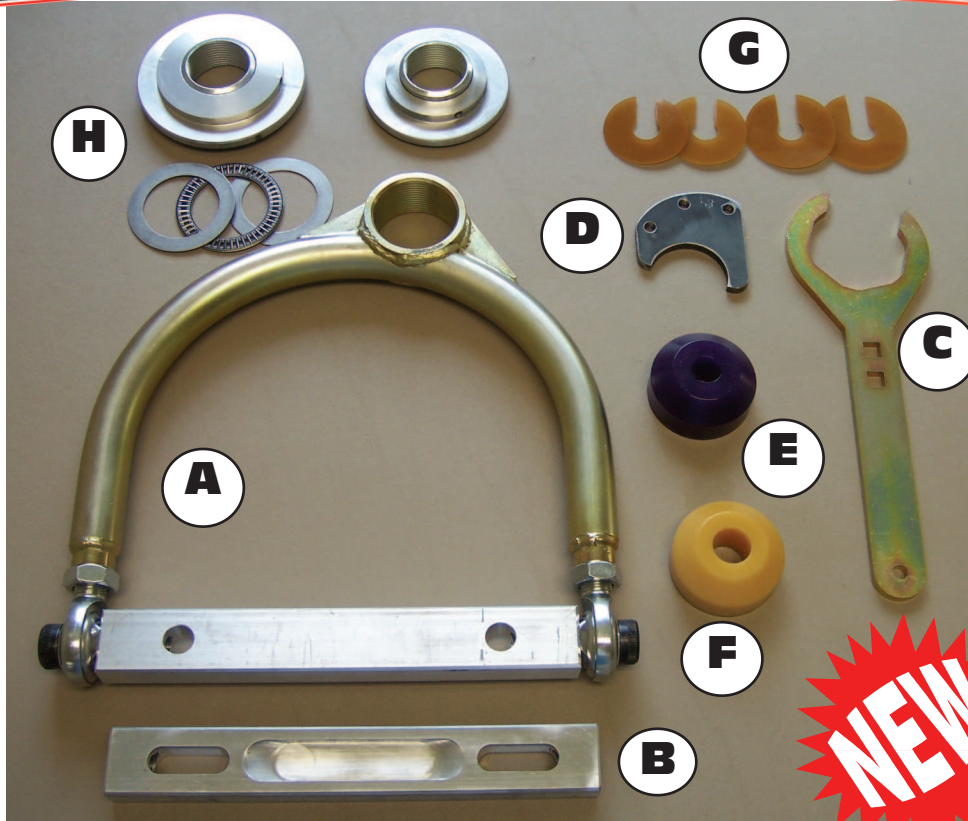

A. 9700 Series 1.25" Offset Upper Control Arm - Available from 8.5" to 12.5" long in .5" increments. Allows racer to tailor his camber curve to keep the tires on the ground. U-tube design provides extra space around shock increasing the possibility of the shock surviving wrecks. 5/8" bearing design gives bind-free movement thru full range of suspension travel. Uses screw-in ball joints. Made from durable 11GA DOM steel tubing. Aluminum cross shaft w/ 9/16" holes on 6" center. In the event of a crash individual parts can be replaced.

B. 9701-S Slotted Upper Control Arm Cross Shaft - Slotted aluminum cross shaft fits 9700 Series Upper Control Arms. Allows racer to adjust Pro Dive and Anti Dive to fine tune front end geometry. Note: Adjustment of Pro Dive and Anti Dive may require an alternate upper control arm mounting plate. One slot is keyed for retaining caster setting with use of 9936 Key Set.

C. 2821 Slider Wrench - Fits ride height adjuster nut on Right Foot Sliders and Spring Carrier Type Bump Stops. Closed design prevents wrench from slipping off nut. Also has square drive holes for ratchet use and a pegboard hook hole. Yellow zinc plated for a long lasting durable finish.

D. 9821 Raised Mounting Tab - Built to raise Right Foot 9800 shock height adjuster .75". Provides additional clearance on left side upper hoop and lets coil over run at a straighter angle. Fits 1.75" tube.

E. 6073P Purple 60 Durometer Poly Bump Stop - 60 Durometer Bump Stop with .625" ID hole to fit shock shafts. 1.06 tall x 2.25" ID

F. 4563A Amber 93 Durometer Poly Spring Bushing - Made from high-impact polyurethane. Designed for use in Right Foot 3rd link systems when used in high HP/ high traction cars such as road race cars.

G. Bump Stop Shims - Slotted design allows quick precise adjustment of bump stops. Shims are made from .062" and .125" thick hard polyurethane with a .625" ID to fit shock shaft. Available in 2.0" and 2.25" OD.

*6042 - 2.0" OD x .0625" Thick * 6043 - 2.0" OD x .125" Thick

*6044 - 2.25" OD x .0625" Thick * 6045 - 2.25" OD x .125" Thick

H. Roller Bearing Spring Seat w/ Steel Adjuster Nut - Makes for easier and faster spring pre-loading. Fits acme thread on Right Foot coil over eliminators and bump stops. Spring seat is aluminum.

* 2883 - 2.5" Spring Seat * 2884 - 3.0" Spring Seat

**Contact Right Foot Performance Products @ 1 (920) 788-0356
for pricing or more information**

